

## Application Note AN-PAN-1018

# Online analysis of acids, bases, and aluminum in anodizing baths

Anodizing is an electrochemical process that involves submerging a metal (usually aluminum) in a cool acidic bath and applying an electric current. The metal itself acts as the positive electrode (anode) in this process. This electrochemical treatment results in a tougher, more corrosion- and wear-resistant surface, while also improving the overall strength of the metal.

Before the aluminum anodizing step, aluminum surfaces are cleaned in etching baths. To maintain surface properties, online monitoring of bases (e.g., NaOH), acids (e.g.,  $\text{H}_2\text{SO}_4$ ,  $\text{HNO}_3$ , HF,  $\text{H}_3\text{PO}_4$ ), and aluminum are required in the bath. This is best achieved by online titration with the 2060 TI Process Analyzer or 2026 HD Titrolyzer, depending on user requirements.

## INTRODUCTION

Aluminum is the most abundant metal found on Earth and is a very reactive base metal [1]. It is suitable for industrial use because it is lightweight, conducts electricity and heat well, and resists corrosion [2].

Aluminum metal reacts with oxygen, water, or other oxidizing agents to create a protective layer of aluminum oxide (passivation) [3–5]. This natural oxide layer protects the underlying aluminum against corrosion, but with some limitations [5].

Anodizing is an electrochemical treatment that increases the thickness of the aluminum oxide layer on the metal surface. The anodizing process makes aluminum harder and more resistant against rust [6]. It involves pretreatment, core treatment, and finishing steps to complete the cycle (Figure 1) [7].

First, the workpiece is cleaned to remove dirt, oil, and lubricants. Then, it is treated with a special solution to remove the natural oxide layer before anodizing. This step is known as alkaline etching.

Maintaining the proper balance between dissolved aluminum and other chemicals in the etching bath is crucial in this step. This balance is often referred to as the aluminum-to-free-soda ratio.

If this ratio strays outside of the recommended range, a reaction occurs where sodium aluminate breaks down into an aluminum trihydroxide substance. This undesirable byproduct coats the workpiece and hinders the anodizing process from achieving a successful finish. In simpler terms, keeping the ideal ratio of substances in the bath ensures a smooth anodizing operation, while an inadequate

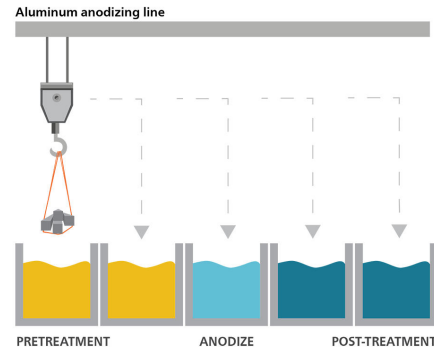


Figure 1. Illustration of a typical anodizing line.

mixture disrupts the process by forming a layer that blocks anodization.

Traditionally, etching processes can suffer from inconsistencies as the etching agent (like sodium hydroxide in this case) is depleted. This depletion leads to a gradual slowdown in the etching rate, resulting in variations in the final product's appearance.

To combat these inconsistencies and ensure high-quality results, recurrent monitoring is necessary by means of an online process analyzer. These analyzers continuously track two crucial components: the concentration of the basic solution (often sodium hydroxide) and the level of dissolved aluminum within the etching bath. By maintaining these within a designated range, consistent etching is ensured throughout the process.

## ACID MONITORING

Additionally, anodizing baths are typically made up of a sulfuric acid electrolyte. During the anodizing process, the workpiece is made anodic so that the metal reacts with oxygen from the anion, and an oxide layer forms on the surface.

For a flawless anodized finish, meticulous control of the aluminum and sulfuric acid concentration within this bath is essential. If the aluminum concentration is too high, it can negatively impact the final surface appearance and lead to increased electrical resistance during the process. Sulfuric acid is consumed due to a degree of product drag out and must be replenished regularly to reduce running costs while still generating a high-quality finish.

While laboratory analysis has traditionally been used to monitor anodizing bath chemistry, it has limitations. This method typically involves manually collecting a sample from the bath, sending it to a lab for analysis, and then waiting for the results. This time delay can lead to inconsistencies in the anodizing process, as the

bath chemistry can fluctuate between sampling times. Additionally, laboratory analysis can be labor-intensive and costly.

In contrast, online process analyzers offer a more efficient and reliable solution for maintaining optimal bath chemistry. These instruments continuously monitor the concentration of critical parameters within the bath, such as dissolved aluminum, sodium hydroxide, and sulfuric acid (free acid). This near real-time data allows for immediate adjustments to be made, ensuring the bath chemistry remains within the designated range 24/7.

The elimination of manual sampling combined with the continuous monitoring offered by online analyzers significantly reduces the risk of bath chemistry fluctuations, ultimately leading to fewer defects and the need for rework. By providing a constant flow of accurate data, online process analyzers empower manufacturers to achieve consistent, high-quality anodizing results.

## APPLICATION

Online monitoring of the alkaline and acidic components as well as aluminum by titration is possible with the 2060 TI Process Analyzer (**Figure 3**) or the 2026 HD Titrolyzer (**Figure 4**) from Metrohm Process Analytics. The selection of the optimal process analyzer depends on the specific monitoring requirements (multiparameter or single parameter, respectively).



**Figure 3.** The 2060 TI Process Analyzer from Metrohm Process Analytics can monitor several critical parameters online in the anodizing process.

**Table 1.** Parameters to monitor in an anodizing line and their expected concentration ranges.

Part of process	Parameter	Range [g/L]
Etching bath	Alkalinity	50–120
	Aluminum	70–150
Anodizing bath	Free acid	0.1–300
	Aluminum	1–10

## REMARKS

Aluminum is also an ideal material for other surface treatment applications. It can be cleaned using acid pickling processes to ensure complete passivation. A pickling process is also used to prepare the aluminum for applying a conversion coating as a protective surface layer.



**Figure 4.** The 2026 HD Titrolyzer from Metrohm Process Analytics can monitor up to two critical parameters online in the anodizing process.

## CONCLUSION

To ensure optimal surface properties are obtained during aluminum anodizing, continuous monitoring of both the cleaning chemicals (basic and acidic solutions) and the aluminum itself is crucial. This can be effectively

accomplished through online process analysis using either the 2060 TI Process Analyzer for multiparameter analysis or the 2026 HD Titrolyzer for single-parameter monitoring.

## REFERENCES

1. Atwood, D. A.; Yearwood, B. C. The Future of Aluminum Chemistry. *Journal of Organometallic Chemistry* **2000**, *600* (1–2), 186–197. DOI:10.1016/S0022-328X(00)00147-9
2. Paz Martínez-Viademonte, M.; Abrahami, S. T.; Hack, T.; et al. A Review on Anodizing of Aerospace Aluminum Alloys for Corrosion Protection. *Coatings* **2020**, *10* (11), 1106. DOI:10.3390/coatings10111106
3. Zumdahl, S. S. *Introductory Chemistry*, 5th edition.
4. Spira, N. *Aluminum Oxidation: Does Aluminum Rust?*. Kloeckner Metals Corporation. <https://www.kloecknermetals.com/blog/aluminum-oxidation-is-aluminum-corrosion-resistant/> (accessed 2024-06-03).
5. Keijzer, M. *PICKLING, AN EXCELLENT SURFACE TREATMENT FOR ALUMINIUM*; Technical bulletin TB 2004/17; Vecom, 2004.
6. *How does Anodizing Increase Corrosion Resistance?*. <https://www.anoplate.com/news-and-events/how-does-anodizing-increase-corrosion-resistance/> (accessed 2024-06-03).
7. Dorigotti, D. Anodising Aluminium: Everything You Need to Know. *Dragon Metal Manufacturing*, 2023.

## RELATED APPLICATION NOTES

[AN-PAN-1012 Online analysis of nickel ion and hypophosphite content in electroless nickel plating baths](#)

[AN-PAN-1019 Online analysis of acids and iron](#)

[in pickling baths](#)

[AN-PAN-1064 Monitoring complexing agents in galvanic baths inline with Raman spectroscopy](#)

## BENEFITS FOR ONLINE PROCESS ANALYSIS

- Higher quality final product and increased metal turnover (MTO) due to online determination of bath parameters.
- **Enhanced** reproducibility, production rates, and profitability (less waste).
- Fully automated diagnostics – automatic alarms for when samples are out of specification parameters.



## CONTACT

メトロームジャパン株式会  
社

143-0006 東京都大田区平  
和島6-1-1

null 東京流通センター アネ  
ックス9階

[metrohm.jp@metrohm.jp](mailto:metrohm.jp@metrohm.jp)

## CONFIGURATION



### 2060 Process Analyzer

Il 2060 Process Analyzer è un analizzatore chimico per via umida online adatto a innumerevoli applicazioni. Questo analizzatore di processo prevede un nuovo concetto di modularità che consiste in una piattaforma centrale, chiamata «armadio di base».

L'armadio di base è composto da due parti. La parte superiore contiene uno schermo tattile e un PC industriale. La parte inferiore contiene una parte flessibile a umido in cui è alloggiato l'hardware per l'analisi effettiva. Se la capacità di base della parte a umido non è sufficiente a risolvere le sfide delle vostre analisi, è possibile aggiungere all'armadio di base fino a quattro ulteriori armadi con parte a umido per garantire uno spazio sufficiente a risolvere le sfide anche delle applicazioni più impegnative. Gli armadi aggiuntivi possono essere configurati in modo tale da combinare ciascun armadio con parte a umido con un armadio per reagente con rilevamento del livello (non a contatto) integrato, in modo migliorare il tempo di funzionamento dell'analizzatore.

Il 2060 Process Analyzer permette di eseguire diverse tecniche chimiche per via umida: titolazione, titolazione Karl Fischer, fotometria, misurazione diretta e metodi di aggiunta standard.

Per soddisfare tutti i requisiti del progetto (o tutte le vostre esigenze), sono disponibili sistemi di condizionamento del campione, a garanzia di una soluzione per analisi robusta. Possiamo offrire qualunque sistema di condizionamento del campione, ad esempio sistemi di raffreddamento o riscaldamento, degassificazione e riduzione della pressione, filtraggio e tanto altro.